



FHSCP-UNV-13.7WL

Emergency LED Driver


- Constant Power Emergency Driver
- Universal Voltage: 120-277VAC, 50/60Hz
- Output Wattage: 13.7W
- Output Current 250-1370mA
- Output Voltage 10-55VDC

This driver will operate any LED module designed to accept any constant input current of 250 - 1370mA and has a forward voltage range of 10 - 55VDC

General Specifications

Input Voltage	120 - 277VAC, 50 / 60Hz
Input Current	0.11A Max.
Input Power	6.9W
Blue Lead (LED Driver Output Pass Through)	2A, 50V Max.
White / Black Lead (Input Pass Through)	1A Max.
Output Current	250 - 1370mA
Output Voltage Range	10 - 55VDC
Output Power / Lumens	13.7W (Constant) / 2200lm
Battery Type / Model Number	Ni-Cad 9.6VDC
Battery Capacity Available	38.4WH
Recharge Time	24 Hours
Discharge Time	90 Minutes
Number of Output Channels	1
RFI / EMI	FCC Part 15A Non-Consumer
Output Type	Class 2
Ambient Operating Temperature Range	0°C to 50°C
Surge Protection	Per C62.41 (TVS)
Protections	Input Overcurrent Protection (Fusible Link)
Service Life	50,000 Hours
Approval / Class	UL 924 Class 2; Damp Location, CEC Title 20
Warranty	5 years from the date of manufacture

Mechanical Data

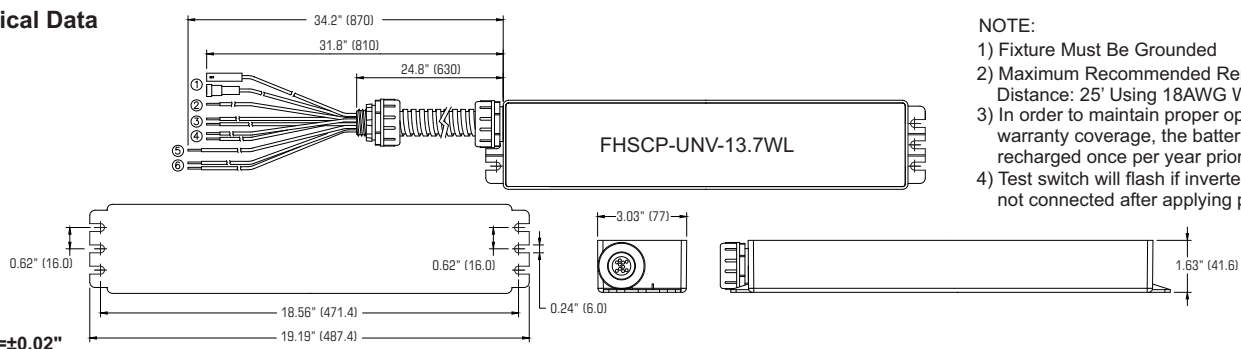

NOTE:

- 1) Fixture Must Be Grounded
- 2) Maximum Recommended Remote Mounting Distance: 25' Using 18AWG Wire.
- 3) In order to maintain proper operation and warranty coverage, the battery must be recharged once per year prior to installation.
- 4) Test switch will flash if inverter connector is not connected after applying power to the unit.

Tolerance=±0.02"

Wiring Diagrams

