



IP67 **RoHS COMPLIANT**

FHS-TSTWL-BC

Bi-Color Wet Location Test Switch

- Stainless Steel
- IP67 (Switch side only)


This Test Switch Will Operate The Following Fulham Emergency LED Drivers:

- FHS2-UNV-36L
- FHS2-UNV-56S
- FHSAC1-UNV-40C
- FHSAC1-UNV-40L
- FHSAC1-UNV-40BLS
- FHSAC1-230-45CE
- FHSAC1-230-45CED
- FHSCP-UNV-6W-L
- FHUPS1-UNV-25L-SD

General Specifications


LED Color	Red / Green
Waterproof	IP67 (Switch side only)
Ambient Operating Temperature Rang	-25°C to 55°C (-13°F to 131°F)
Mechanical Life	>100,000 Cycles
RoHS	Yes
Warranty	5 Years

Mechanical Drawings

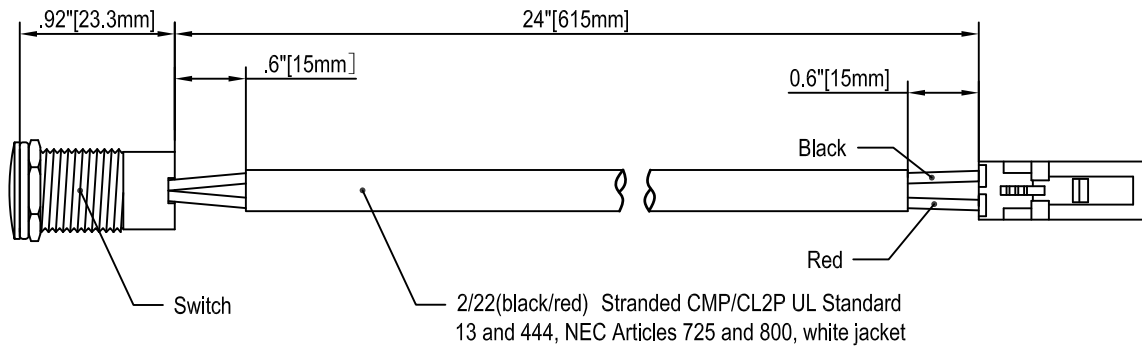

Max. Remote Mounting Distance	
FHS2-UNV-36L	20'
FHS2-UNV-56S	20'
FHSAC1-UNV-40C	20'
FHSAC1-UNV-40L	20'
FHSAC1-UNV-40BLS	20'
FHSAC1-230-45CE	20'
FHSAC1-230-45CED	20'
FHSCP-UNV-10P-L-SD	20'
FHSCP-UNV-6W-L	65'
FHUPS1-UNV-25L-SD	65'

Overall Switch Dimension

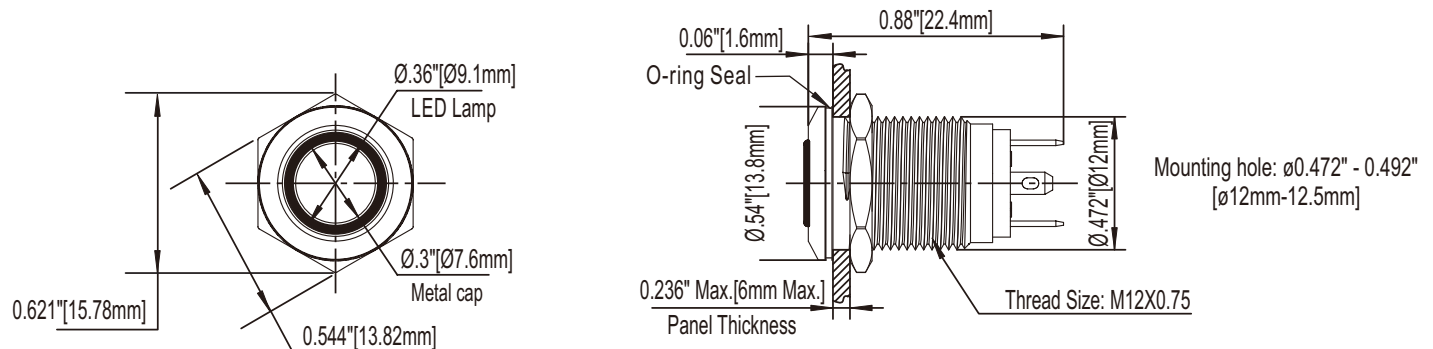



IP67 **RoHS COMPLIANT**

FHS-TSTWL-BC

Part Number Matrix

FHS

LED Driver
FHS = FireHorse HotSpot

TST

Accessory Type
TST = Test Switch

WL

Accessory
WL = Wet Location Rated

BC

Accessory
BC = Bi-Color


Product Image

FHS-TSTWL-BC



Packaging

Master Carton

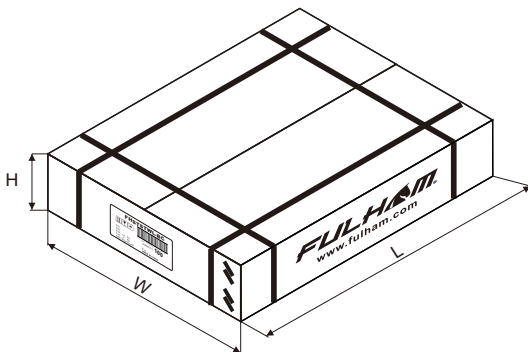

OUTER DIMENSION		
L	W	H
13.38"(340mm)	9.64"(245mm)	2.55"(65mm)
Net Weight	Gross Weight	QUANTITY
3.52 lbs. (1.6 kg)	4.4 lbs. (2 kg)	100pcs.