


# SC-230-287-CUV

## Rapid Start Fluorescent Ballast

- High Frequency Electronic Ballast
- Input Voltage: 230VAC, 60Hz
- Rapid Start
- cULus Listed, Class P

This Ballast Will Operate Following Lamps:



180mm T5 UV / 287mm T5 UV


## General Specifications

Input Voltage	230VAC, 60Hz
Lamps Operated	1 Lamp
EMI / RFI Compliance	FCC Part 18-A
Sound Rating	"A"
Ballast Type	Rapid Start
Voltage Transients	ANSI 62.41
Input Protection	Fuse
Output Protection	EOL
Min. Operating Temp	0°C (32°F)
Max. Case Temp	75°C (167°F)
Approvals Class	cULus Listed, Class "P", 1 Outdoor, RoHS
Warranty	2 Years from the date of manufacture when properly installed.

## Electrical Data

Lamp Wattage / Type	Lamps Operated	Input Wattage	Line Current	Power Factor	Ballast Factor	Efficacy Factor	THD	Current Crest Factor
180mm T5 UV	1	11.40	0.096	0.522	0.842	7.390	157.7%	<1.7
287mm T5 UV	1	15.77	0.136	0.501	0.939	5.950	165.6%	<1.7

## Mechanical Data

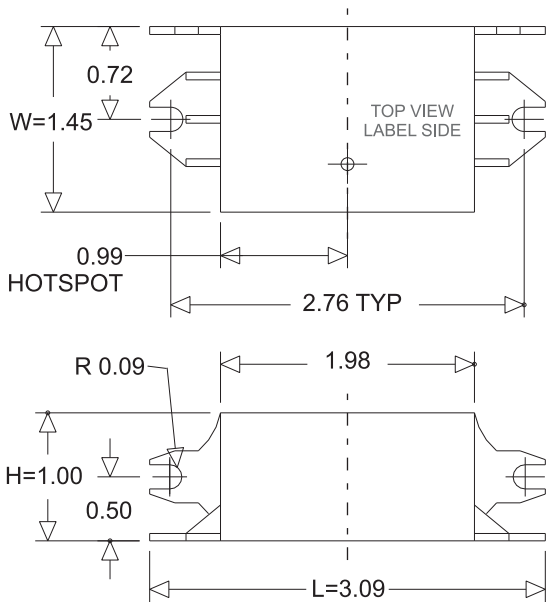

Where : L = Length, W = Width, H = Height

## Wiring Diagrams

Wire Color	Length (Inches)
Black	12" ±1"
White	12" ±1"
Red	8" ±1"
Blue	8" ±1"

