



T1M1UNV0350-15L

IP64



RoHS COMPLIANT


INSTALLATION INSTRUCTIONS



NOTE:


1. Driver has two (2) mounting tabs with a semi-round hole each.
2. Fasten / Drill a screw through each of the driver's semi-round holes and the surface where the driver will be mounted.
3. Driver must make full contact with surface for proper thermal management. und holes and the surface where the driver will be mounted.

WIRING DIAGRAM

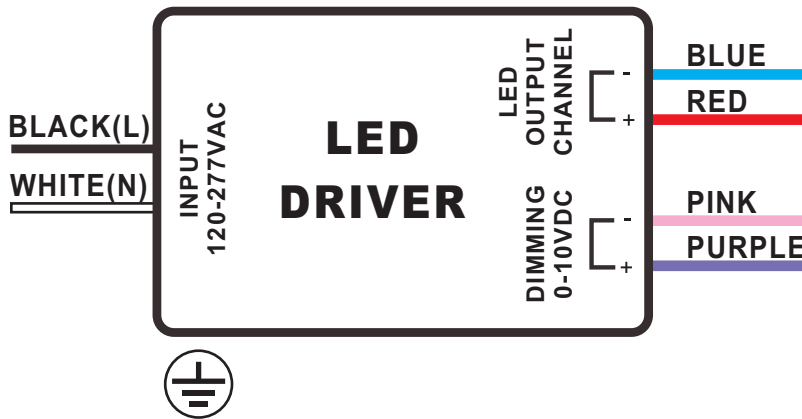

Note: Pink or Gray dimming wire provided, use interchangeably.

INPUT SIDE	LENGTH	OUTPUT SIDE	LENGTH
BLACK	12"[304.8mm]	RED	6"[152.4mm]
WHITE	12"[304.8mm]	BLUE	6"[152.4mm]
		PURPLE	12"[304.8mm]
		PINK	12"[304.8mm]



NOTE:

1. The driver must be installed by a licensed electrician.
2. The driver must be grounded.