

T1240048V-150ME

SPECIFICATIONS

Output Current: 3.13A

Output voltage 48Vdc

•

•



- SLIM Constant Voltage LED Driver
- Flicker free, O/P Ripple Current < 10%
- **Output Wattage : 150W Max**

Application - 48V Magnetic Tracks

•

General Specifications				
Rated Input Voltage	220-240/240/230VAC, 50/60Hz			
Operating Input Voltage Range	196-264VAC, 50/60Hz			
Input Current	0.95 A Max.			
Input Power	167W Max.			
Power Factor	>0.95 @ 230Vac Full Load			
THD	< 10% @ 230Vac Full Load			
Efficiency	>88%			
Driver Type	Constant Voltage			
Output Current	3.13A			
Output Voltage Range	48VDC <u>±</u> 5%			
Output Power	150W			
Number of Output Channels	1 Channel			
Dimming Controller Type/Dimming Range	NA			
RFI/EMI	CE			
Output Type	Class II			
Ambient Operating Temperature Range	-20°C to 45°C			
Max. Case Temperature	70°C			
Sound Rating	NA			
Input Surge Protection	Line-Neutral 1kV			
Protections	Input Over Current : NON-Resettable			
	Input Over Voltage : NA			
	Input Under Voltage : NA			
	Output Short Circuit : Auto recovery			
	Output Open Circuit : Auto recovery			
	Output Overload : YES			
	Over Temperature YES			

	Over Temperature : YES
Service Life	50,000 hours @ Tc 70°C
Approvals / Class	Dry Locations
Warranty	3 Years
Weight	0.425Kg
Note - Ripple & Noise are measured a	at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor.


Fulham extends a limited warranty only to the original purchaser or to the first user for a period of <u>3 years @ Tc 70°C</u> from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.




T1240048V-150ME SPECIFICATIONS




THD vs. Load



Power Factor Characteristics

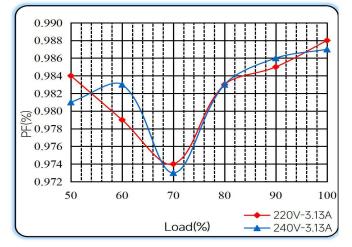


Operating window

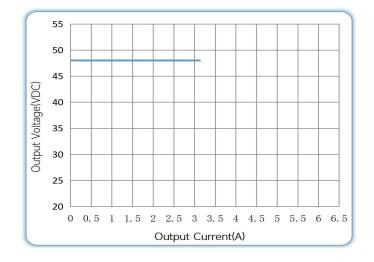

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of <u>3 years @ Tc 70°C</u> from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.


Efficiency vs. Load







Mechanical Data

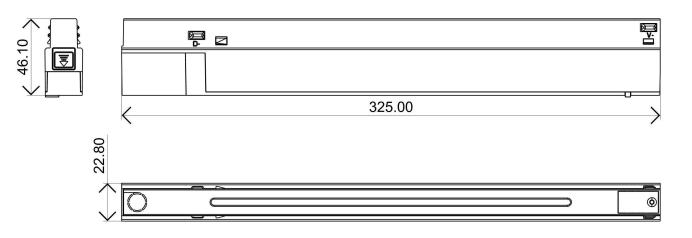


Product Image





Tolerance=±0.5mm





Master	carton

OUTER DIMENSION						
L	W			Н		
380mm		290mm		230mm		
Net Weight		Gross Weight	Q	QUANTITY		
21.2 kg		21.6 kg	50 pc.			

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of <u>3 years @ Tc 70°C</u> from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.