



T12400150-06F G1 SPECIFICATIONS

IP 20
SELV Equivalent



- Constant Current LED Driver
- Output Wattage: 6W
- Output Current: 150mA +10%
- Output voltage range of 21-42Vdc
- Suitable for Dry Locations
- PC Enclosure
- Surge Immunity 2KV
- Class II

General Specifications

Rated Input Voltage	220-240/230/240Vac,50/60Hz
Operating Input Voltage Range	160-280Vac,50/60Hz
Input Current	0.04A @ Rated I/P Voltage & Full Load
Input Power	8W @ Rated I/P Voltage & Full Load
Power Factor	>0.95 @ Rated I/P Voltage & Full Load
THD	<15% @ Rated I/P Voltage & Full Load
Efficiency	>75% @ Rated I/P Voltage & Full Load
Driver Type	Constant Current
Output Current	150mA ±10%
Output Voltage Range	21-42Vdc
No Load Output Voltage	55Vdc Max
Output Power	6W Typical
Number of Output Channels	1 Channel
Dimming Controller Type/Dimming Range	NA
Output Type	Class II
Ambient Operating Temperature Range	-10°C to 50°C
Max. Case Temperature	70°C
Input Surge Protection	Line-Neutral 2kV As per EN 61000-4-5
Protections	Input Over Current : NON-Resettable
	Input Over Voltage : 320Vac Operation for 48Hrs, 360Vac Operation for 2Hrs
	Input Under Voltage : NA
	Output Short Circuit : Auto Recovery (HICCUP Mode)
	Output Open Circuit : Auto Recovery (HICCUP Mode)
	Output to Ground short : YES
	Output Overload : YES
Over Temperature : NA	
Service Life	25,000 hours @ Tc Max
Approvals / Class	Suitable for Dry Locations
Warranty	2 years
Weight	0.065Kg

Note : All Performance Specified at Rated Voltage and Full Load.
Recommended to be used only for Indoor Application.

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of **2 years @ Tc Max** from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.



Figure 1

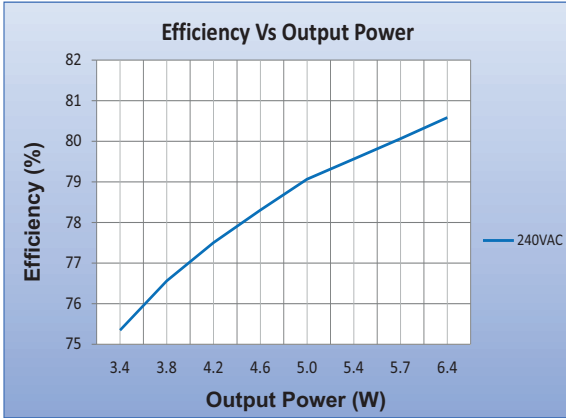


Figure 2

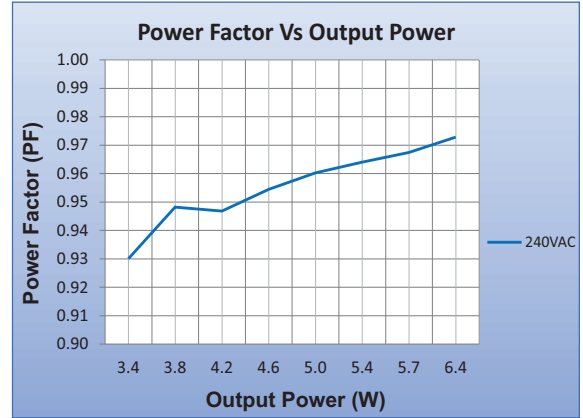


Figure 3

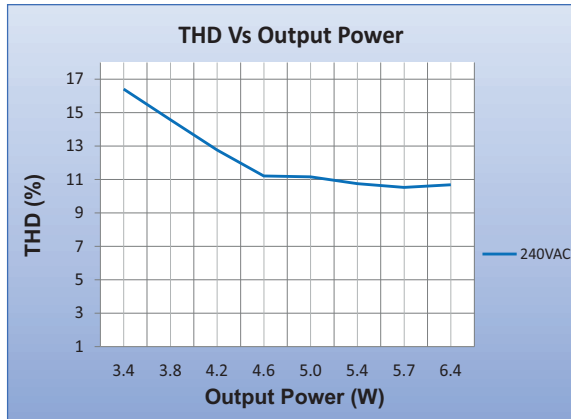


Figure 4

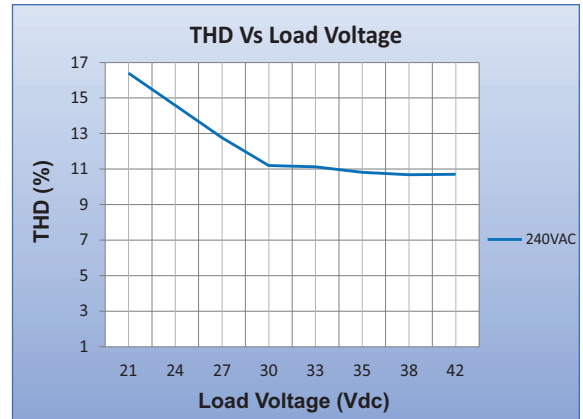


Figure 5



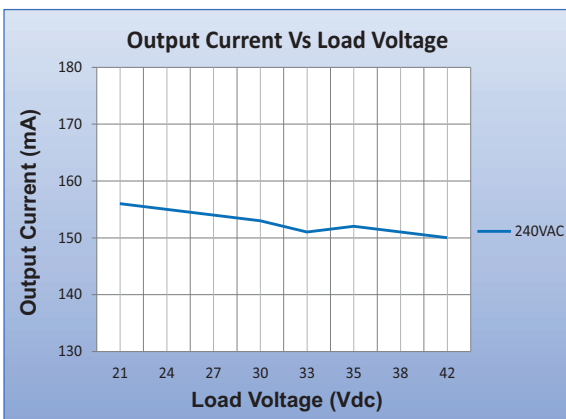


Figure 6

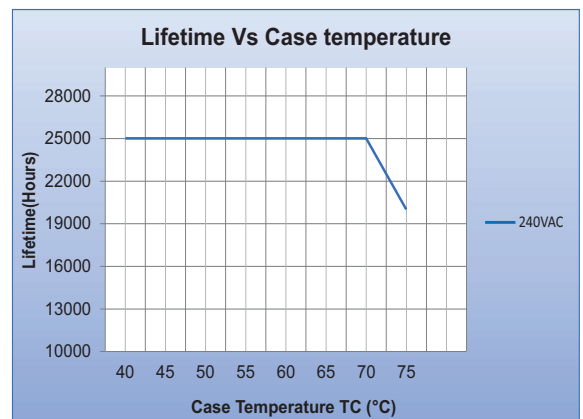


Fulham extends a limited warranty only to the original purchaser or to the first user for a period of **2 years @ Tc Max** from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.

Mechanical Data

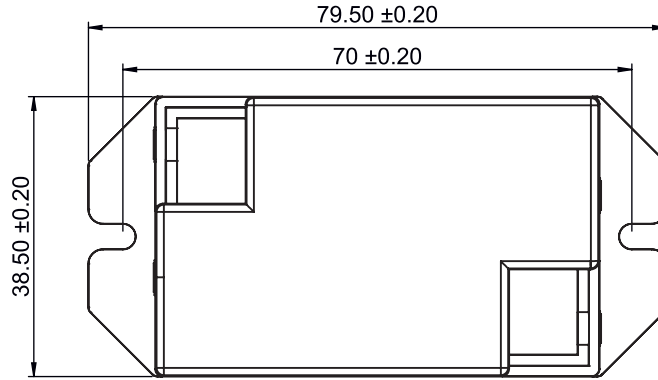


FRONT VIEW

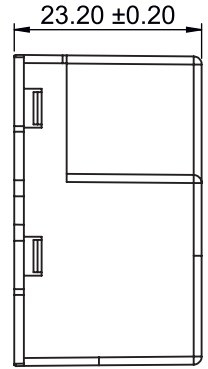

SIDE VIEW

Product Image

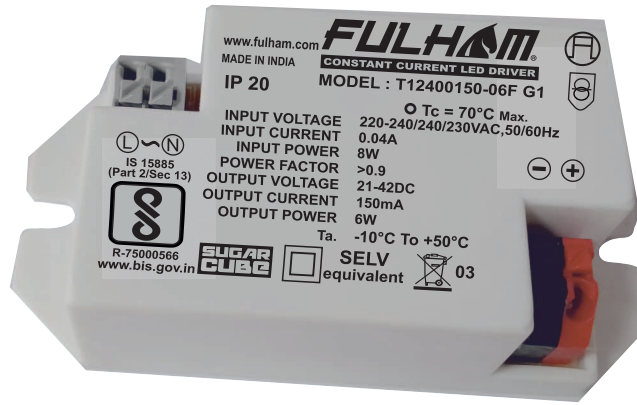

Note : All Dimensions are in mm.

Tolerance=±0.5mm


Wiring Diagrams



INPUT 2 PIN CONNECTOR	GREY	LINE
	GREY	NEUTRAL

OUTPUT 2 PIN CONNECTOR	BLACK	NEGATIVE
	RED	POSITIVE

Packaging




Master carton

OUTER DIMENSION		
L	W	H
215mm	155mm	130mm
Net Weight	Gross Weight	QUANTITY
2.92 Kg	3.25kg	50 pc.

Installation Instructions:

- The driver should be installed in a dry, acid-free, oil free, fat-free environment.
- Do not exceed the declared Hot spot temperature(Tc max) under any circumstances.
- ≥ 08 cm clearance must be kept between the drivers as per installation diagram, When multiple drivers used.



Fulham extends a limited warranty only to the original purchaser or to the first user for a period of **2 years @ Tc Max** from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.
© Fulham Company Limited, All Rights Reserved.