

# T1240024V-150PB.

### **SPECIFICATIONS**





- Constant Voltage LED Driver
- Output Wattage: 150WOutput Current: 6.25A
- Output Voltage Range of 24Vdc
- · Aluminum extrusion enclousure and cables
- Suitable For Dry, Damp and Wet Locations
- Ripple Current <5% (LF<200Hz) (pk/avg)
- 440Vac application @ 8Hrs
- OVP Cut-off
- Surge Immunity 4KV

### **General Specifications**

Rated Input Voltage	220-240/240/230Vac,50/60Hz			
Operating Input Voltage Range	120-300Vac,50/60Hz			
Input Current	0.83A @ Rated Voltage			
Input Power	172W @Rated I/P Voltage			
Power Factor	>0.95 (@ Full Load at Rated Voltage)			
THD	<10% (@ Full Load at Rated Voltage)			
Efficiency	>85% @ Rated I/P Voltage & Max Load)			
Driver Type	Constant Voltage			
Output Current	6.25A Max			
Output Voltage Range	24Vdc +4%,-5%			
Output Power	150W Max			
Number of Output Channels	1 Channel			
Dimming Controller Type/Dimming Range	NA			
Output Type	Class I			
Ambient Operating Temperature Range	-10°C to 55°C			
Max. Case Temperature	75°C			
Input Surge Protection	L-N-4KV, L-N-E-4KV As per EN 61000-4-5			
Protections	Input Over Current : Non Resettable (Fuse)			
	Input Over Voltage : Shutdown @ >325Vac, Auto recovery			
	440Vac for 8 hours @ 35°C, 320Vac for 48 hours @ 50°C			
	Input Under Voltage : NA			
	Output Short Circuit : Auto Recovery (HICCUP Mode) Continuous			
	Output Open Circuit : YES			
	Output to Ground short: YES			
	Output Overload : YES			
	Over Temperature : NA			
Service Life	50,000 Hours @ Tc Max			
Approvals / Class	SELV Equivalent ; Dry, Damp and Wet Locations			
Warranty	05 Years			
Weight	1.05Kg			



# T1240024V-150PB.

**SPECIFICATIONS** 





Figure 1




Figure 2




Figure 3




Figure 4




Figure 5





Figure 6






# T1240024V-150PB.


**SPECIFICATIONS** 









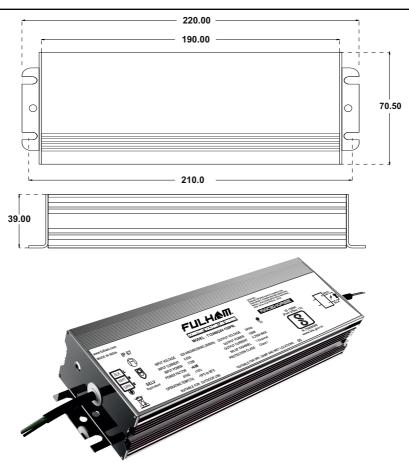

**Product image** 

Note :All Dimensions are in mm.


Tolerance =  $\pm 0.5$ mm

### **Wiring Diagrams**



INPUT SIDE	LENGTH	OUTPUT SIDE	LENGTH	
BLACK (L)		RED (+)	2 CORE CABLE	
WHITE (N)	3 CORE CABLE 200mm	BLACK (-)	200mm	
GREEN (E)	20011111		·	

### **Packaging**




### Master carton

OUTER DIMENSION						
L		W		Н		
235mm		230	)mm	155mm		
Net Weight	Gross Weight		QL	JANTITY		
9.45kg	ę	9.9kg		09		

#### **Installation Instructions:**

- The driver should be installed in a dry, acid-free, oil free, fat-free environment.
- Do not exceed the declared Hot spot temperature(Tc max) under any circumstances.
- ≥ 08 cm clearance must be kept between the drivers as per installation diagram, When multiple drivers used.



Fulham extends a limited warranty only to the original purchaser or to the first user for a period of <u>05 years @ Tc max</u> from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.