

T1240070S-30FB5 **SPECIFICATIONS**

IP 20 SELV Equivalent



- **Constant Current LED Driver**
- Multiple current selection through DIP switch
- Output Wattage 30W •
- Output voltage range of 21~43Vdc •

- •

Application - Shop, Retail & Hospitality

General Specifications							
Rated Input Voltage	220-240/230/240Vac,50/60Hz						
Operating Input Voltage Range	120-310Vac 50/60Hz						
Input Current		0.16A Max @ Full Load at Rated Voltage					
Input Power		36W @ Full Load at Rated Voltage					
Power Factor		>0.95 @ Full Load at Rated Voltage					
THD		<10% @ Full Load at Rated Voltage					
Efficiency	≥85% @	≥85% @ Full Load at Rated Voltage					
Driver Type	Constant	Constant Current					
Output Current		700mA ±7.5%, 650mA ±7.5%, 600mA ±7.5%, 550mA ±7.5% *Refer DIP switch Table for O/P current selection					
Output Voltage Range	21~43Vd	21~43Vdc					
No Load Output Voltage	55Vdc M	55Vdc Max					
Output Power	30W						
Number of Output Channels	1 Channe	1 Channel					
Output Type	Class II	Class II					
Dimming Controller Type	NA	NA					
Dimming Range	NA	NA					
Ambient Operating Temperature Range	-20°C to	-20°C to 50°C					
Max. Case Temperature	70°C	70°C					
Input Surge Protection	L-N - 4K	V as per EN	V 61000-4-				
Protections	Input Ov	Input Over Current : Non Resettable (Fuse)					
	Input Ov	Input Over Voltage : Cutoff @ Vin 320Vac±5%, Auto Recovery : Immunity - 300Vac for 48 hours & 440Vac for 48 hours					
	Input Un	Input Under Voltage : Shutdown <100Vac, Auto recovery					
	Output S	Output Short Circuit : Auto Recovery (HICCUP Mode)					
	Output O	Output Open Circuit : Auto Recovery (HICCUP Mode)					
	Output to	Output to Ground short :YES					
	Output O	Output Overload : YES					
	Over Ten	Over Temperature : YES					
Service Life	30,000 H	30,000 Hours @ Tc Max					
Approvals / Class	SELV Eq	SELV Equivalent ; Dry Locations					
Warranty	03 Years						
Weight	0.130 Kg						
	0.130 Kg		Switch	Prated (W)			

Irated (mA)	DIP S	Prated (W)	
	PIN 1	PIN 2	T Tated (VV)
700	ON	ON	30.1
650	ON	OFF	27.9
600	OFF	ON	25.8
550	OFF	OFF	23.65

Note : Suitable for Indoor application only

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of <u>03 years @ Max Tc</u> from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.



T1240070S-30FB5 SPECIFICATIONS



Figure 1

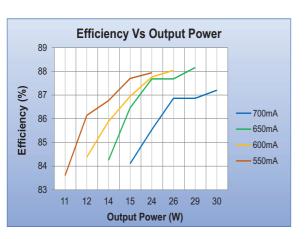


Figure 3



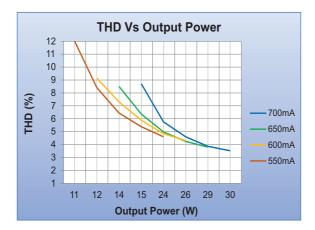



Figure 5






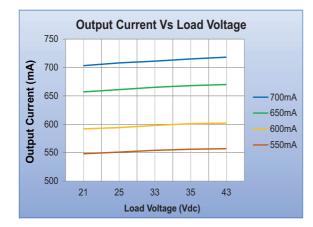

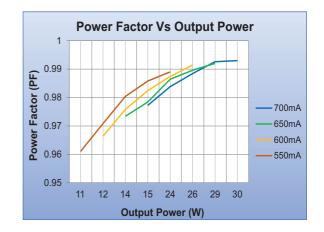

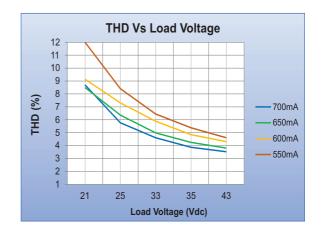

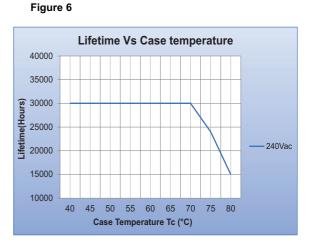


Fulham extends a limited warranty only to the original purchaser or to the first user for a period of <u>03 years @ Max Tc</u> from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.







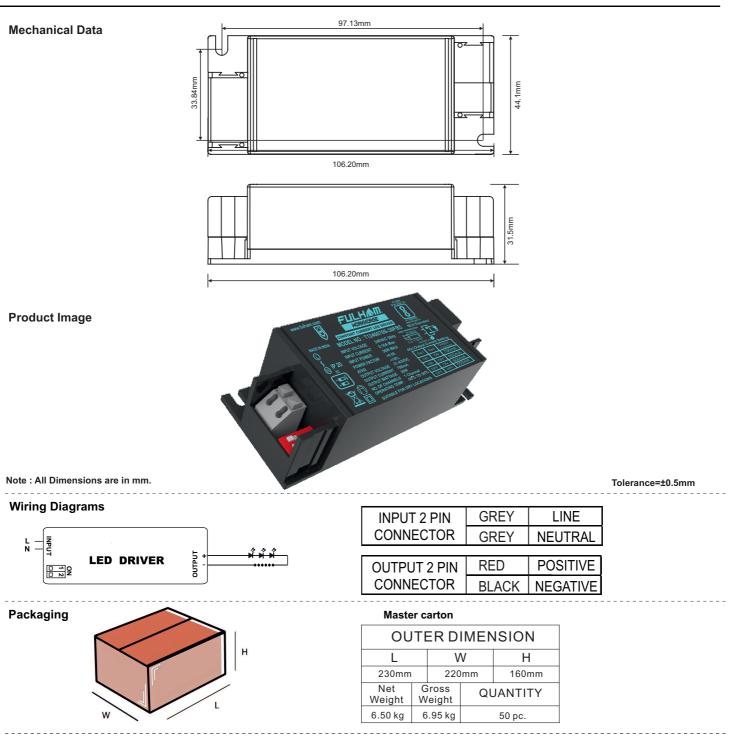

Installation Instructions:

- The driver should be installed in a dry, acid-free, oil free, fat-free environment.
- Do not exceed the declared Hot spot temperature(Tc max) under any circumstances.
- ≥ 08 cm clearance must be kept between the drivers as per installation diagram, When multiple drivers used.

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of <u>03 years @ Max Tc</u> from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.