



- Constant Current Round LED Driver
- Output Wattage: 28 / 32W
- Output voltage range of 24-40Vdc
- Output Current: 700 or 800mA $\pm 7\%$
- Surge Immunity 4kV
- OVP and UVP Cut-off
- 440Vac application @ 48Hrs
- Suitable for Dry Locations
- PC Cabinet
- Application - Shop, Retail & Hospitality

General Specifications

Rated Input Voltage	240Vac $\pm 20\%$, 50Hz
Operating Input Voltage Range	120-320Vac, 50Hz
Input Current	0.16A @ 240Vac
Input Power	37W Max.
Power Factor	>0.95
THD	<10%
Efficiency	>85%
Driver Type	Constant Current
Output Current	700 or 800mA $\pm 7\%$
Output Voltage Range	24-40Vdc
No Load Output Voltage	50Vdc Max.
Output Power	32W Max.
Number of Output Channels	1 Channel
Dimming Controller Type/Dimming Range	NA
Output Type	Class II
Ambient Operating Temperature Range	-10°C to +60°C
Max. Case Temperature	80°C
Input Surge Protection	Line-Neutral 4kV As per EN 61000-4-5
Protections	Input Over Current : NON-Resettable
	Input Over Voltage : Cutoff @ $V_{in} > 320\text{Vac}$, Auto Recovery Immunity - 440Vac for 48 Hours
	Input Under Voltage : Shutdown <100Vac, Auto recovery
	Output Short Circuit : Auto Recovery (HICCUP MODE)
	Output Open Circuit : Auto Recovery (HICCUP MODE)
	Output to Ground short : YES
	Output Overload : YES
Over Temperature : YES	
Service Life	30,000 hours @ T_c Max
Approvals / Class	SELV Equivalent, Dry Locations
Warranty	3 Years
Weight	0.150 Kg

Note : All Performance Specified at 240Vac @ Full Load.
 Recommended to be used only for Indoor Application.

Output Current Setting :

I_{rated} (mA)	Output Current Setting	P_{rated} (W)
700	OPEN	28
800	SHORT	32

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of **3 years @ T_c Max** from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.
 © Fulham Company Limited, All Rights Reserved.



Figure 1

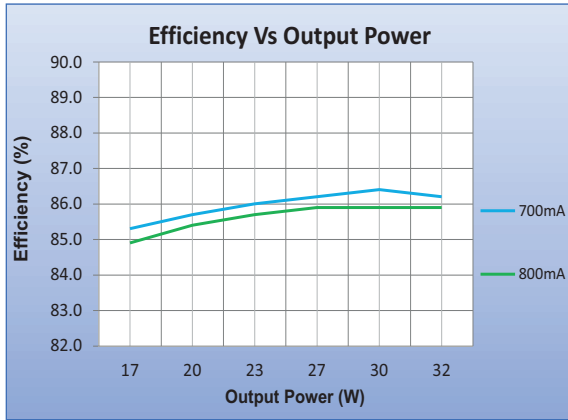


Figure 2

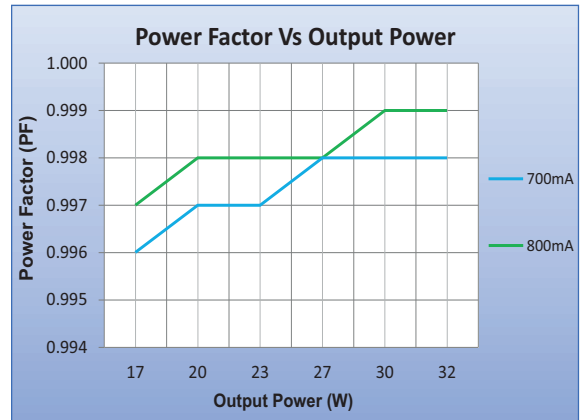


Figure 3

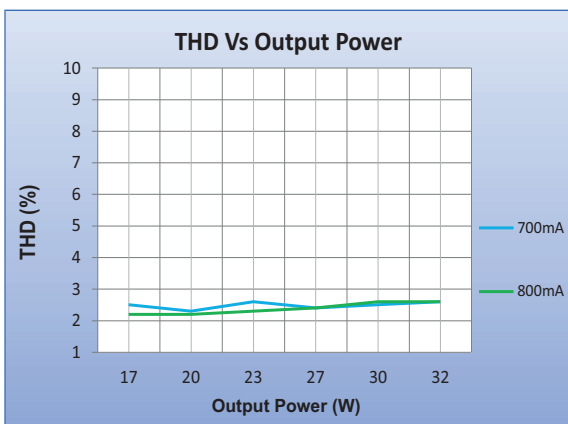


Figure 4




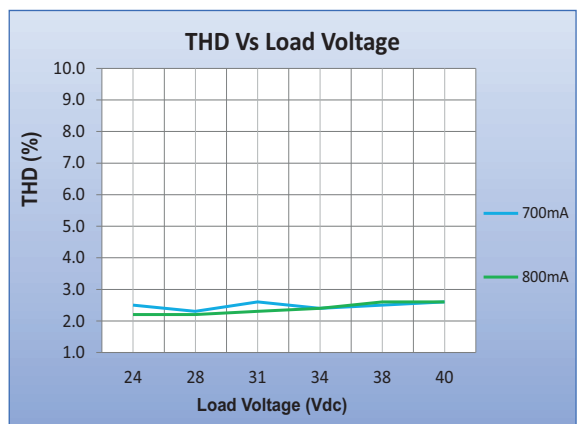


Figure 5

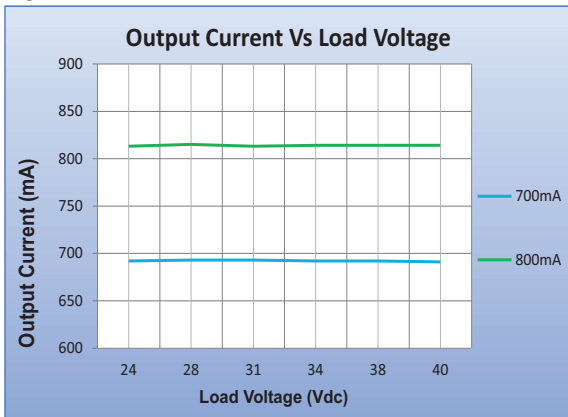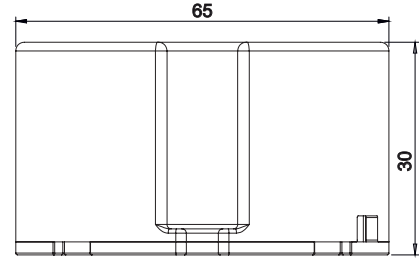

Mechanical Data :

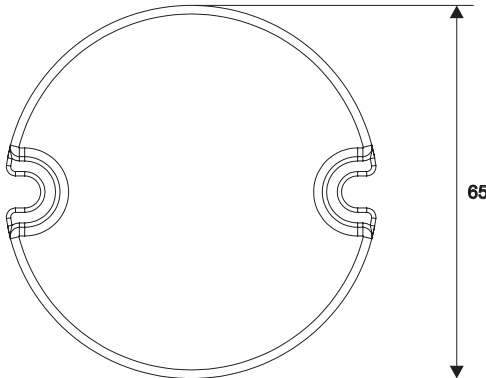


FRONT VIEW

Product Image




Note : All Dimensions are in mm. Tolerance=±0.5mm

Wiring Diagrams

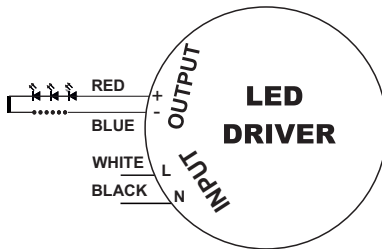

INPUT SIDE	LENGTH	OUTPUT SIDE	LENGTH
BLACK (L)	175±5mm	RED (+)	175±5mm
WHITE (N)		BLUE (-)	

Packaging



Master carton

OUTER DIMENSION		
L	W	H
8.66"(220mm)	8.66"(220mm)	4.13"(105mm)
Net Weight	Gross Weight	QUANTITY
8.92 lbs. (4.05 kg)	9.52 lbs. (4.32 kg)	27 pc.

Installation Instructions:

Connect Wires as per details given on the Driver Screen. Keep proper ventilation around the LED Driver and do not stack any object on it. Also a 10-15 cm clearance must be kept when the adjacent device is a heat source. Do not exceed the declared Hot spot temperature(Tc max) under any circumstances.

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of **3 years @ Tc Max** from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.