

T1240100S-38UB5





- 2 Wire In-Track Constant Current LED Driver
- A-THD < 5%
- Output Current selection: 1000, 950, 900, 850mA
- Flicker Free: O/P Ripple current ≤5% (LF <200Hz)
- Output Wattage: 38W
- Inbuilt Surge protection 4KV
- Output voltage range of 24~38Vdc
- Suitable for Dry locations

- · Available in Black / White Color
- Application
 - Retail Lighting
 - Office Lighting Decorative Lighting

1 licker 1 rec. 0/1 httppic current =0 /0 (El =200112)	• Guitable for Bry I	- Decorative Lighting			
General Specifications					
Rated Input Voltage	220-240/240/230Vac,50/60Hz				
Operating Input Voltage Range	160-300Vac,50/60Hz				
Input Current	0.21 @ Rated Input Voltage				
Input Power	44W Typical				
Power Factor	>0.95 @ Rated I/P Voltage & Full Load				
ATHD	<5% @ Rated I/P Voltage & Full Load				
Efficiency	>85% @ Rated I/P Voltage & Full Load				
Driver Type	Constant Current				
Output Current	1000mA ±7%, 950mA ±7%, 900mA ±7%, 850mA ±7%				
	*Refer DIP switch Table for O/P current selection				
Output Voltage Range	24~38Vdc				
Output Power	38W Typical				
Number of Output Channels	1 Channel				
Dimming Controller Type/Dimming Range	NA				
Output Type	Class II				
Ambient Operating Temperature	-10°C to +40°C				
Max. Case Temperature	65°C Max.				
Input Surge Protection	Line-Neutral 4kV As per EN 61000-4-5				
Protections	Input Over Current	: NON-Resettable			
	Input Over Voltage	: Cutoff @ >300Vac, Auto recovery			
		Immunity - 300Vac for 48 hours & 440Vac for 8 hours			
	Input Under Voltage	: Cutoff @ Vin <100Vac; Auto Recovery			
	Output Short Circuit	: Auto Recovery (HICCUP MODE)			
	Output Open Circuit	: Auto Recovery (HICCUP MODE)			
	Output Overload	: YES			
	Thermal Foldback	: NA			
Service Life	50,000 hours @ Tc Max				
Approvals / Class	SELV Equivalent, Dry Locations				
Warranty	5 Years				
Weight	0.150 Kg				

DIP Switch Chart:

I _{rated} (mA)	DIP Switch		Prated (W)
ITaled(ITIA)	PIN 1	PIN 2	r rated (VV)
1000	ON	ON	38.0
950	ON	OFF	36.1
900	OFF	ON	34.2
850	OFF	OFF	32.3

Note: Suitable for Indoor application only

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years @ Tc Max from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.



T1240100S-38UB5 SPECIFICATIONS

Figure 1

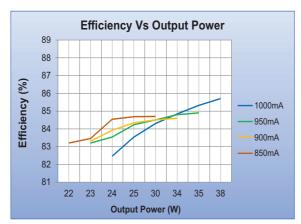


Figure 2

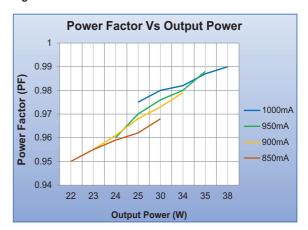


Figure 3

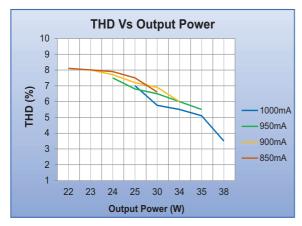


Figure 4


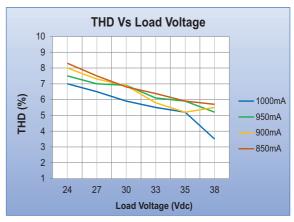


Figure 5



Fulham extends a limited warranty only to the original purchaser or to the first user for a period of <u>5 years @ Tc Max</u> from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.

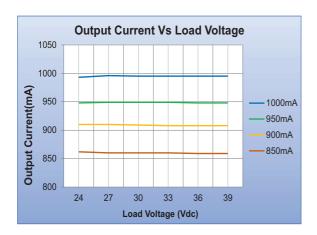



T1240100S-38UB5 SPECIFICATIONS





Mechanical Data:

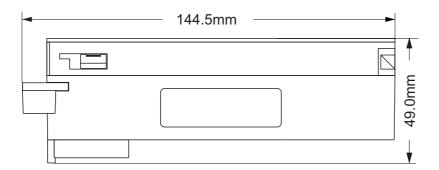




Product Image



Note: All Dimensions are in mm

Tolerance = ± 0.5mm

Packaging




Master carton

OUTER DIMENSION					
L		W		Н	
190mm	ı	155mm		200mm	
Net Weight		ross eight	QUANTITY		
3.01Kg		3.20Kg	20pc.		

Installation Instructions:

- The driver should be installed in a dry, acid-free, oil free, fat-free environment.
- Do not exceed the declared Hot spot temperature(Tc max) under any circumstances.
- ≥ 08 cm clearance must be kept between the drivers as per installation diagram, When multiple drivers used.



Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years @ Tc Max from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.